


Features

- ▶ PANDA fiber
- ▶ High extinction ratio
- ▶ Low angle misalignment ($< 3^\circ$)
- ▶ Low Insertion loss
- ▶ GR-326 compliance

Application

- ▶ Integrated optics
- ▶ Fiber sensor
- ▶ Coherent communication system
- ▶ Laser-Doppler Anemometry and Velocimetry
- ▶ Optical Coherence Tomography

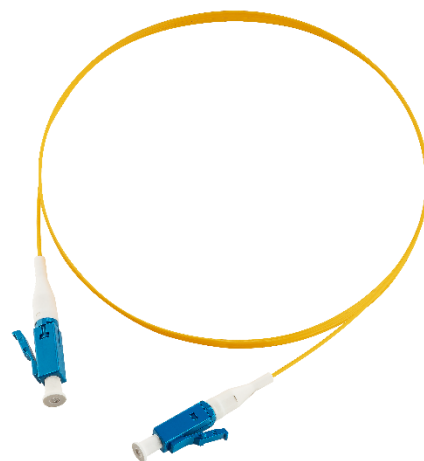

Performance Specification

ITEM	Optical Characteristic	
	Insertion Loss (dB)	Extinction Ratio (dB)
LC/PC	<0.3	>27
LC/APC	<0.3	>27

